



# DFP2INT

## Floating Point To Integer Pipelined Converter

ver 2.07

### OVERVIEW

The DFP2INT is the **pipelined** floating point to integer converter. The input and output numbers format is according to IEEE-754 standard. DFP2INT supports single precision real numbers and double word integers (4 Bytes). Convert operation is pipelined to 2 levels. Input data are fed every clock cycle. The first result appears after latency equal to 2 clock periods and next results are available **each clock** cycle. Full precision and accuracy are accomplished.

### APPLICATION

- Math coprocessors
- DSP algorithms
- Embedded arithmetic coprocessor
- Data processing & control

### KEY FEATURES

- Full IEEE-754 compliance
- Single precision real input numbers
- Double word output numbers(4 Bytes)
- Simple interface
- No programming required
- 2 levels pipelining
- Full accuracy and precision
- Results available at every clock
- Overflow, underflow and invalid operation flags
- Fully configurable

All trademarks mentioned in this document are trademarks of their respective owners.

- Fully synthesizable, static synchronous design with no internal tri-states

### DELIVERABLES

- ◆ Source code:
  - ◇ VHDL Source Code or/and
  - ◇ VERILOG Source Code or/and
  - ◇ Encrypted, or plain text EDIF netlist
- ◆ VHDL & VERILOG test bench environment
  - ◇ Active-HDL automatic simulation macros
  - ◇ ModelSim automatic simulation macros
  - ◇ Tests with reference responses
- ◆ Technical documentation
  - ◇ Installation notes
  - ◇ HDL core specification
  - ◇ Datasheet
- ◆ Synthesis scripts
- ◆ Example application
- ◆ Technical support
  - ◇ IP Core implementation support
  - ◇ 3 months maintenance
    - Delivery the IP Core updates, minor and major versions changes
    - Delivery the documentation updates
    - Phone & email support

### LICENSING

Comprehensible and clearly defined licensing methods without royalty fees make using of IP Core easy and simply.

Single Design license allows use IP Core in single FPGA bitstream and ASIC implementation.


<http://www.DigitalCoreDesign.com>  
<http://www.dcd.pl>

Unlimited Designs, One Year licenses allow use IP Core in unlimited number of FPGA bitstreams and ASIC implementations.

In all cases number of IP Core instantiations within a design, and number of manufactured chips are unlimited. There is no time restriction except One Year license where time of use is limited to 12 months.

- Single Design license for
  - VHDL, Verilog source code called HDL Source
  - Encrypted, or plain text EDIF called Netlist
- One Year license for
  - Encrypted Netlist only
- Unlimited Designs license for
  - HDL Source
  - Netlist
- Upgrade from
  - HDL Source to Netlist
  - Single Design to Unlimited Designs


## SYMBOL

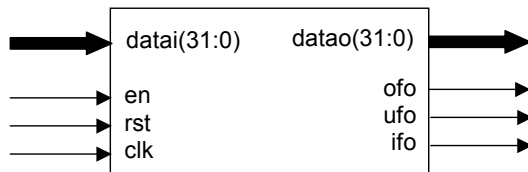

## PINS DESCRIPTION

PIN	TYPE	DESCRIPTION
clk	Input	Global system clock
rst	Input	Global system reset
en	Input	Enable computing
datai[31:0]	Input	Data bus input
datao[31:0]	Output	Data bus output
ofo	Output	Overflow flag
ufo	Output	Underflow flag
ifo	Output	Invalid flag

## BLOCK DIAGRAM

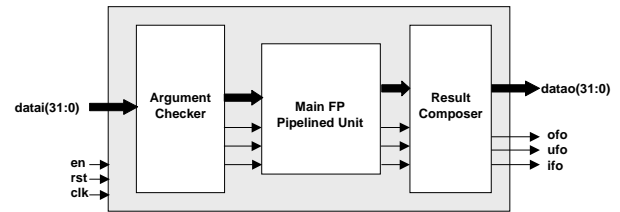

**Arguments Checker** - performs input data analyze against IEEE-754 number standard compliance. The appropriate numbers and information about the input data classes are given as the results to Main FP Pipelined Unit.

**Main FP Pipelined Unit** - performs floating point to integer conversion. Gives the complex information about the results to Result Composer module.

**Result Composer** - performs result rounding function, data alignment to IEEE-754 standard, and the final flags setting.

## PERFORMANCE

The following table gives a survey about the Core area and performance in the ASIC devices (all key features have been included):

Device	Optimization	Gates	F <sub>max</sub>
0.25u typical	area	1700	150 MHz
	speed	2900	380 MHz
0.18u typical	area	1600	180 MHz
	speed	2300	550 MHz

*Core performance in ASIC devices*

## CONTACTS

For any modification or special request please contact to Digital Core Design or local distributors.

### **Headquarters:**

Wroclawska 94

41-902 Bytom, POLAND

*e-mail:* [info@dcd.pl](mailto:info@dcd.pl)

*tel.* : +48 32 282 82 66

*fax* : +48 32 282 74 37

### **Distributors:**

Please check <http://www.dcd.pl/apartn.php>